

Technical data

Submersible pump

Actun FIRST SPU4.04-05-B/XI4-€


Project name

Project ID

Installation location

Customer pos.no

Date 2020-04-20

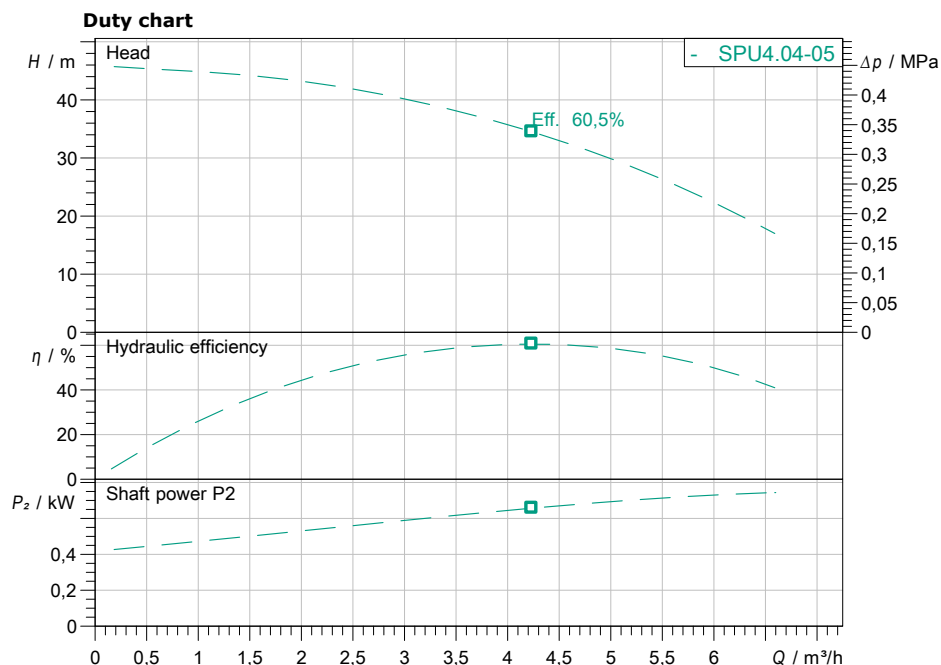

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20,00 °C
Density	998,30 kg/m ³
Kin. viscosity	1,00 mm ² /s

Hydraulic data (Duty point)

Flow	
Head	
Shaft power P2	
Hydraulic efficiency	
Power input P1	

Product data

Submersible pump	
Actun FIRST SPU4.04-05-B/XI4-60-1-220	
Max. operating pressure	0,5 MPa... + 30 °C
Fluid temperature	3 °C
Minimum Efficiency Index (MEI)	≥ 0,7

Motordata per Motor/Pump

Mains connection	1~ 220 V / 60 Hz
Permitted voltage tolerance	±10 %
Nominal speed	3450 1/min
Rated power P2	0,37 kW
Rated current	3,00 A
Power factor	0,97
Degree of protection	IP68
Insulation class	F

Cable

Length of connecting cable	2 m
Cable type	4G1,5

Fitting dimensions

Discharge size	Rp 1 1/4
Flange standard	-

Materials

Pump housing	1.4301
Motor housing	1.4301
Shaft	1.4021
Impeller	PPE

Information for order placements

Weight approx.	11,4 kg
Item number	6083628

Approval

Dimensions

mm

H	618
H1	257