

ARI TOP THE BEST COMFORT WITH MAXIMUM SAFETY



/ QUICK HEATING

Thanks to the two heating elements of 4,5 kW in the bottom side and upper side of the tank, you can reduce the first shower timing and guarantee the best amount of hot water available.



/ MAXIMUM SAFETY

Thanks to the T&P valve and 10 bar pressure tank.

**Two by 4,5kW
heating element**

ARI TOP

EASY
INSPECTIONEXTERNAL
TEMPERATURE
REGULATIONDRY HEATING
TECHNOLOGYTITANIUM
PLUS

NEW


 علامة الجودة الإماراتية
Emirates Quality Mark


COMFORT

- Quick heating thanks to the two heating element of 4,5 kW
- Temperature regulation

EFFICIENCY&ENERGY SAVING

- Ecological polyurethane insulation


QUALITY

- T&P safety valve
- 10 bar pressure safety valve
- Titanium glasslined inner tank tested at 16 bar
- Oversize magnesium anode
- 5-bolts flange

DESIGN

- Exclusive Italian design
- Floor Standing

two by 4,5kW
heating element

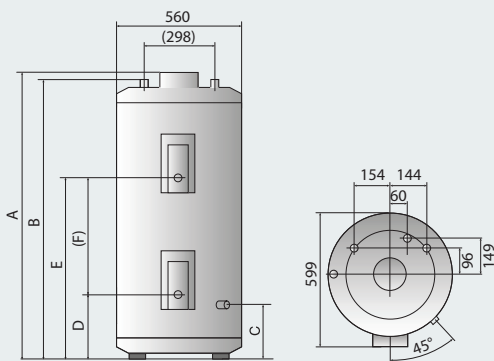

TECHNICAL DATA

		ARI TOP 160 240V MO	ARI TOP 200 240V MO	ARI TOP 300 240V MO	ARI TOP 300 415V TR
Capacity	l	160	200	300	300
Power	kW	4,5kW / 4,5 kW*	4,5kW / 4,5 kW*	4,5kW / 4,5 kW*	4,5 kW + 4,5 kW**
Voltage	V	240	240	240	415
Phase		Mono-phase	Mono-phase	Mono-phase	Tri-phase
Installation		Floor Standing	Floor Standing	Floor Standing	Floor Standing
Diameter	mm	560	560	560	560
Anode		Magnesium	Magnesium	Magnesium	Magnesium
Protection	IP	IPX1	IPX1	IPX1	IPX1
Inner tank		Enameled	Enameled	Enameled	Enameled
Working pressure	bar	10	10	10	10

OVERALL DIMENSIONS

a	mm	1089	1331	1857	1857
b	mm	1058	1299	1825	1825
c	mm	238	250	254	254
d	mm	291	310	314	314
e	mm	651	822	1174	1174
f	mm	360	512	860	860

CODE

3060339	3060340	3060341	3060344
---------	---------	---------	---------

* The heating element will not work together, maximum absorbtion power of 4,5 kW.

** Heating elements will work simultanuesly. Max absorbtion 9kW.

LEGEND

- E** Cold water inlet G 1"
U Hot water outlet G 1"